

An Artificial Intelligence Approach Towards Sensorial Materials

Florian Pantke, Stefan Bosse, Michael Lawo, Dirk Lehmhus
ISIS Sensorial Materials Scientific Center
University of Bremen
Bibliothekstrasse 1, 28359 Bremen, Germany
{fpantke, sbosse, mlawo}@informatik.uni-bremen.de,
dirk.lehmhus@uni-bremen.de

Matthias Busse
Fraunhofer IFAM
Wiener Strasse 12, 28359 Bremen, Germany
matthias.busse@ifam.fraunhofer.de

Abstract—Sensorization aims at equipping technical structures with an analog of a nervous system by providing a network of sensors and communication facilities that link them. The objective is that, instead of having been designed to loads and tested to conditions, a structure can experience and report design constraint violations by means of real-time self-monitoring. Specialized electronic components and computational algorithms are needed to derive meaning from the combined signals of integrated sensors. For this task, artificial intelligence approaches constantly gain importance; the more so as the trend of ever increasing sensor network size and density suggests that sensor and structure may soon become one, forming a sensorial material. Current simulation techniques capture many aspects of sensor networks and structures. For decision making and communication, the intelligent agent paradigm is an accepted approach, as is finite element analysis for structural behavior. To gain knowledge how sensorial structures can most effectively be built, an artificial intelligence based process for the design of such structures was developed that uses machine learning methods for fast load inference. It is presented in this paper, along with evaluation results obtained in experiments using a finite element model of a strain gauge equipped plate, which demonstrate the general practicability.

Keywords-sensorial material; finite element method; sensor network; machine learning; multi-agent system

I. INTRODUCTION

Adopting principles from nature, sensorization aims at equipping technical structures with an analog of a nervous system by providing a network of sensors and communication facilities that link them. Specialized electronic components as well as suitable computational algorithms are needed to derive meaningful information from the sensor signals. The main objective is to build structures that—instead of being designed once and tested for health based on externally observable exceptional events or in predefined intervals—constantly monitor themselves during operation by means of sensors attached to the structure's surface, directly printed on it [1], or embedded inside the material [2]. Such structures will be able to infer facts about their current loading state, e.g., autonomously detect overloading, as well as permanently record and carry with them their entire mechanical and/or thermal loading history. In order to attain high sensor densities, i.e., to embed hundreds or thousands

of sensors into one single structure, all sensors and electronic circuits need to be miniaturized to a maximum degree. As these components usually have no significant load-bearing capabilities, the volume they consume within the structure directly affects the latter's mechanical stability. Thus, in the sensor integration process, avoiding the introduction of evident macrostructural defects is imperative [3] [4].

An additional requirement, particularly in mobile applications, is a low power consumption profile of the electronic components. It simply is not feasible in most cases to equip the structure with a high-performance microprocessor unit along with sufficient RAM that would be necessary for inferring facts about the applied load cases from the sensor signals by employing the finite element method (FEM) during operation, for instance. Less computation- and resource-intensive approaches are called for. Especially if smart structures reacting to stimuli from their environment [5] are desired, a spatial distribution of numerous simple, miniaturized, low-power evaluation units over the entire structure seems advisable. As is the case for a human accidentally touching a hot plate, fast locally confined reactions preventing (further) damage may be vital for an engineered structure, while calculating, e.g., the millimeter-precise location of load introduction along with the global geometric state of the entire structure may be an unaffordable luxury. For long-term availability, the respective sensor nodes should ideally draw on local energy sources [6].

This article presents a conceptual approach to designing sensorial structures and implementing their self-monitoring capabilities utilizing basic methods from the field of artificial intelligence (AI). The central aim is to derive useful information despite having to cope with limited computational power and with noise in sensor signals. Lack of calibration as well as of matching between sensors and the possibility of drift pose additional major challenges in this task. The evaluation results presented in this article suggest that simple machine learning models created once at design time and then embedded into the structure for real-time querying can already yield acceptable load identification precision without having to rely on a finite element model of the structure to be available at runtime.

The remainder of this paper is organized as follows: Section II provides an overview of the basic AI approach towards creating sensorial structures. Section III presents a robust sensor network developed for reliable sensor data assessment and Section IV introduces a functional mockup system, which will serve to implement and evaluate different approaches to sensor data assessment and load case inference. An overview of two simple machine learning methods that were used for first trials with strain data from FEM simulation is given in Section V. Evaluation results are presented in Section VI. Section VII portrays how the intelligent agent paradigm can be employed for monitoring more complex structures in a distributed fashion. Section VIII closes with a conclusion and outlook.

II. AN AI APPROACH TOWARDS SENSORIAL STRUCTURES

The AI-based process model for the design and realization of sensorial structures is depicted in Figure 1. First, a geometric CAD model of the desired technical structure is created. Based on the model, a library of standard load cases that are expected during operation as well as exceptional overloading or misuse cases is defined. This library can in principle comprise several hundred load cases, e.g., various forces and temperatures applied at various positions. FEM simulations then are run on the model, generating a large database of effect data (e.g., displacements, strains, stresses, temperature values etc.), which, depending on the complexity of the FEM model and the number of defined load cases, can be several gigabytes in size and may take several days to compute. It is, of course, impractical to directly run load case inference algorithms on such a large amount of pre-calculated data during actual operation of the structure, let alone to embed it into the structure using ROM circuits. Therefore, data compaction and data mining algorithms [7] [8] need to be applied to the FEM input and output in an offline preprocessing step to yield a considerably reduced dataset of key figures much fewer in count but of high informative value in terms of reliable load case estimation and overload detection. The simplest solution here would be to let a human expert choose selected sensor positions based on the geometric characteristics of the structure and manually rig the model with a desired distribution of sensors for assessing strain, pressure, temperature or similar effects that are present in the FEM calculation output. Mathematical optimization methods [9] [10] can be used to aid finding optimal sensor distributions at this stage. If a good sensor distribution has been found, a physical prototype equipped with real sensors is built, to which (a subset of) the previously defined load case library is physically applied in a series of training experiments. The sensor signals resulting from these load cases are recorded and stored along with the respective FEM results in the effects database. The same data reduction procedures that are performed on the FEM

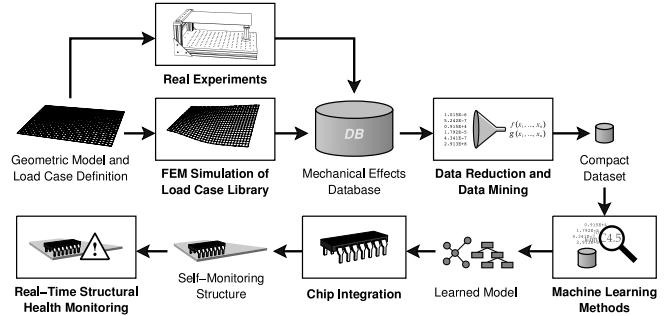


Figure 1. Artificial intelligence approach for the design of sensorial structures

output variables can be executed on the measured sensor values. For example, key figure calculation rules producing statistics (e.g., minimum, maximum, average value, standard deviation, or much more complex computations) over selected groups or multilevel hierarchies of sensors could be defined or automatically learned using machine learning and data mining techniques. It is an open research topic how such calculation rules can be automatically generated from the effects and sensor value database in the most beneficial way with respect to a given load case inference problem.

The resulting compact dataset is fed as training data into suitable machine learning algorithms [8] [11] [12]. The focus in this step lies on algorithms whose learned models as well as respective model evaluation procedures are simple and small enough to be directly transformed into miniaturized low-power hardware circuits. Embedding these circuits into the material yields a sensorial structure, which is able to constantly monitor its loading state during operation and issue alerts to its user when overloading is detected.

III. A ROBUST SENSOR NETWORK

When building structures that monitor their own health state by means of spatially distributed sensors, it is important that the introduction of local defects in the communication links between evaluation nodes, e.g., caused by overloading or misuse, does not result in entire regions of the structure being cut off from communication and, consequently, global monitoring processes. Hence, the communication infrastructure for sending sensor values and issued alerts across the structure must be robust with respect to sudden failure of communication links. For this purpose, we have implemented a sensor network capable of dynamically routing data packets across irregular sensor node topologies, e.g., caused by damage of communication links. Such an irregular network topology is shown in Figure 2. Network nodes are numbered from 0 to 12; communication links are depicted as arrows.

Each sensor node in the network processes the signals of a small local group of physical sensors (e.g., two to eight in count) and is connected to spatially neighboring nodes

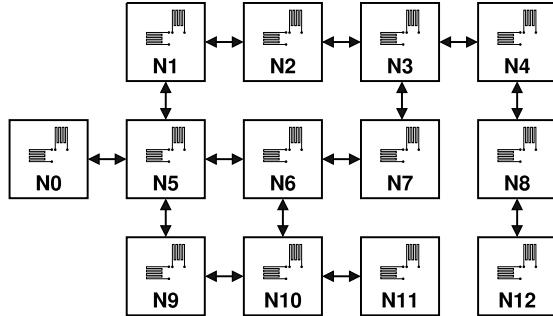


Figure 2. Irregular sensor network topology

via point-to-point serial links that define the network topology. A node provides analog signal conditioning, analog-to-digital conversion (ADC), and digital data processing. To enable the usage of unmatched and uncalibrated sets of sensors, the signal processing is implemented with a zooming window ADC approach. Spatial proximity relations among the physical sensors are directly translated to proximity relations in the network topology. With respect to communication, all nodes simultaneously act as routers and communication endpoints, with unique topological coordinates assigned to each of them. Communication is message based using the Simple Local Intranet Protocol (SLIP) [13], which employs dynamic routing strategies to forward data packets from their source nodes to desired destination nodes in the network. For this purpose, each packet contains a discrete multi-dimensional vector specifying the packet's destination in terms of remaining distance in the network topology. All routing information is held in the packets without any additional routing tables maintained by the sensor nodes. The SLIP communication protocol stack is implemented in hardware as a System-on-a-Chip architecture using FPGA/ASIC target technologies, and in software using the C and ML programming languages. Both Hardware and software implementation are automatically generated from the same high-level programming model using the ConPro synthesis framework [14]. The communication protocol is freely scalable in the network's size and topological dimensionality.

IV. FUNCTIONAL MOCKUP SYSTEM

To practically evaluate the described approach, a functional mockup system was developed, which allows to experiment with different sensor assessment, data mining, and machine learning methods. As an evaluation scenario, we use a simple plate mounted with a fixture along one short side and a movable single point support at the bottom face. Different weights can be placed on the top face. The objective is to estimate the locations and masses of the weights and recognize overload situations only by examining a few strain values measured at the plate's bottom face using machine learning algorithms. For this purpose, pairs of

orthogonally aligned strain gauges are attached to the bottom face of the plate at selected positions. Each pair measures the strain in the X and Y direction of the local face coordinate system and is connected to a miniaturized sensor node as described in Section III. The physical framework built for this scenario permits the installation of plates with different dimensions, material properties, and sensor distributions. Each possible sensor configuration consists of sensor nodes arranged in a topologically two-dimensional mesh network with each node having direct connections to up to four neighbors.

Initial trials using a nitrile rubber plate with glued-on commercial constantan strain gauges showed that the high load-induced strains occurring in the material lead to acceptable signal levels and satisfactory load identification results. Since the long-term objective is to integrate the sensors and electronic circuits into load-bearing structures, comparable load identification accuracy also needs to be attained for other common materials such as steel and for application cases with considerably smaller load-induced strains during standard operation—as is the case with steel loaded within its elastic range.

Figure 3 shows the experimental setup equipped with a St37 steel plate, on which four pairs of Ag strain gauges have been printed in an Aerosol Jet® printing process [15] using commercial pure silver ink. With material combinations permitting the increase of sintering temperatures, a future switch to CuNi alloys, which show significantly lower temperature dependence of resistivity, is envisaged. In the depicted setup, insulation between the printed conductive paths and the steel substrate was provided by a silicone-based coating layer, once more applied by means of Aerosol Jet® printing. However, in measurement tests with this plate and the sensor nodes' ADC components, the signal quality attained with the printed Ag strain gauges was not yet suitable for a reliable identification of loads limited to the elastic range.

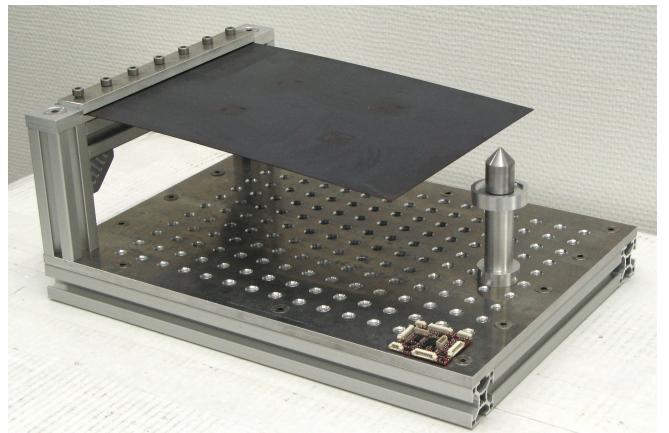


Figure 3. Metal plate setup

Hence, with a revision of the physical metal plate setup pending, the evaluation presented in this paper uses completely noise-free strain values from the FEM simulation step (cf. Figure 1) to gain a first set of reference success rates for the model of a $200 \times 300 \times 1$ mm St37 steel plate. For each examined machine learning method, the obtained results represent the best-possible prediction accuracy that theoretically could be achieved with (physically nonexistent) perfect sensors and ADC components. As the prediction accuracy can be viewed as an indicator for the general practicability of our approach, the success rates obtained in this evaluation will be used as benchmarks for further improvement of the hardware prototype (such as ADC components, sensor printing processes etc.) as well as development of more sophisticated machine learning approaches.

The FEM load case library used in the evaluation is defined by dividing the top face of the plate into a 20×20 mm grid of 176 equidistant load positions. At each position weights of 100 g and 200 g are separately applied, resulting in 352 different load cases with a single weight each. As the sensor inputs directly depend on the strains occurring in the material, overloading is defined in terms of displacements instead of strains. This adds a further complication to the evaluation scenario: We aim at investigating how good the tested machine learning algorithms perform at expressing correlations between different types of mechanical effects. Thus, overloading is defined to occur if and only if at least one point on the plate's surface moves downward in global Z direction more than a given threshold t_z . To prevent a bias towards positive or negative classifications in the training set, which may cause misleadingly higher success rates in the cross-validation examined in Section VI, the load case library is partitioned into 50 % overload and 50 % non-overload situations. This is done by obtaining the maximum Z displacement for each load case from the FEM output and setting the threshold to the median of these 352 values, yielding $t_z = 130.6 \mu\text{m}$ for this particular scenario. Here, the desired result from the machine learning stage is a—preferably simple—mapping from the measured sensor values to estimated X and Y coordinates of the applied load (in the local surface coordinate system), an estimated mass of the weight in grams, and a yes/no classification whether the displacement threshold t_z has been exceeded by any point of the plate. Accordingly, the desired physical result is an actual low-power microchip that implements this mapping in hardware.

V. K-NEAREST-NEIGHBOR AND DECISION TREE LEARNING

Adhering to the design constraints imposed by the application scenario, experiments were started with an implementation of two of the most basic classification and regression algorithms. Namely, C4.5 decision tree learning [11] and the simple k -Nearest-Neighbor algorithm [12] were examined.

The training set contains all correct load positions, masses and classification results for every load case in the load case library along with the respective 8-dimensional strain vector determined via either sensor measurement or FEM simulation. To answer a query with k -Nearest-Neighbor (k -NN), the k entries closest to the query strain vector are selected and combined into a single estimation for the target variables. Numerical regression of the load position and mass can be achieved by calculating the weighted average, whereas discrete (e.g., Boolean) classification is possible by means of weighted voting. For a fixed k , let E_1, \dots, E_k denote the k nearest points in the training set, (x_i, y_i, m_i) the load coordinates and mass of E_i , and $Q \in \mathbb{R}^8$ the query vector. The estimated load position and mass (x_Q, y_Q, m_Q) for Q is calculated using inverse distance weighting, i.e.,

$$\begin{pmatrix} x_Q \\ y_Q \\ m_Q \end{pmatrix} = \sum_{i=1}^k w(E_i) \cdot \begin{pmatrix} x_i \\ y_i \\ m_i \end{pmatrix} \quad (1)$$

$$\text{with } w(E_i) = 1/(\text{dist}^2(Q, E_i) \cdot w_{\text{sum}}),$$

$$w_{\text{sum}} = \sum_{i=1}^k 1/(\text{dist}^2(Q, E_i))$$

and $\text{dist}^2(Q, E_i)$ being the squared Euclidean distance between points Q and E_i in 8-dimensional strain space.

Weighted voting is done by adding the weighting factors $w(E_i)$ of all E_i that have the same classification and then assigning to Q the classification that gained the largest sum, defaulting to a “safe” answer (yes) in case of a tie.

In our first experiments, the C4.5 decision tree learning is employed for classification only as its reliable extension to multivariate numerical regression is more elaborate.

VI. EVALUATION RESULTS

Since only values from FEM simulation are used in the evaluation, i.e., no comparison with measured values from the physical prototype is made, the spike placed under the plate's bottom face was modeled as a roller support in the FEM model for sake of simplicity. For C4.5 and k -NN with $1 < k < 10$, a leave-one-out cross-validation (LOOCV) was conducted on the training set described in Section IV: Each singleton subset of the training set was used exactly once for querying the machine learning models constructed from its complementary set and comparing the result with the known correct values. In addition, the models obtained from the entire 352 element training set were queried using an intermediate test set INT consisting of 150 g weights placed exactly at the midpoints between the previously defined grid positions, resulting in further 10×15 load cases neither the coordinates nor masses of which appear anywhere in the training set. Depending on the value chosen for k , the percentage of correct classifications achieved with k -NN varies between 89.77 % and 90.91 % in LOOCV and between 92 % and 93.33 % for INT. The C4.5 decision tree attained 94.32 % correct classifications in LOOCV and

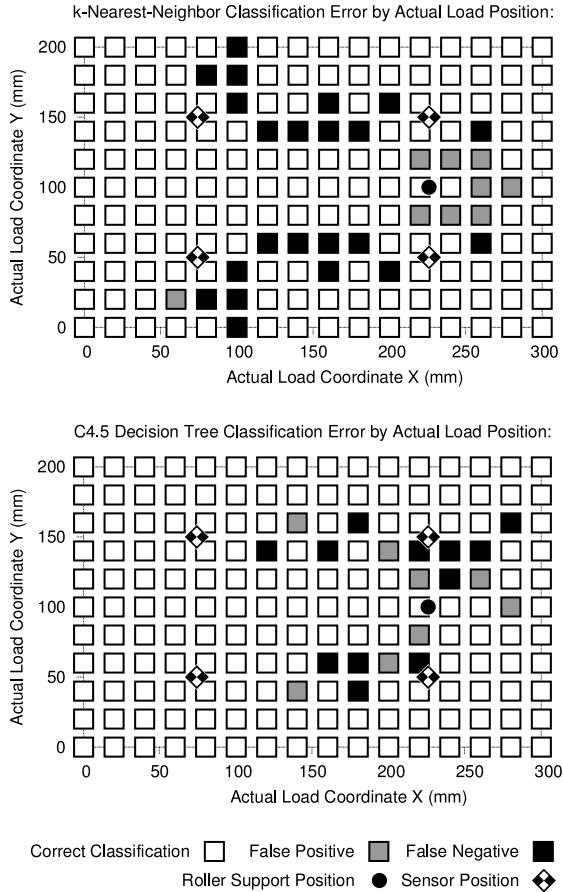


Figure 4. Classification results obtained with leave-one-out cross-validation on the training set

96.22 % for INT. The locations where false positives and false negatives were returned in LOOCV by C4.5 and k -NN with $k = 4$ are shown in Figure 4. While at each position a 100 g and a 200 g load case were tested, no position produced wrong classifications for both masses.

The numerical regression results obtained for the test set INT by k -NN with $k = 4$ are illustrated in Figure 5. The difference vectors from the actual to the estimated load positions are shown in the bottom vector field (median length 9.09 mm, average length 15.88 mm), whereas the absolute error in load mass estimation is visualized in the upper plot (median 20.39 g, average 25.38 g). Among all tested values for k , the median difference vector length of the load coordinate regression was smallest with $k = 4$, while the average was smallest with $k = 2$. In Figure 4 and 5, the locations of the strain sensors and the roller support are indicated with diamond and circle symbols, respectively. The fixture is located on the Y coordinate axis. It is clearly noticeable that the regression error is largest in the vicinity of the supports.

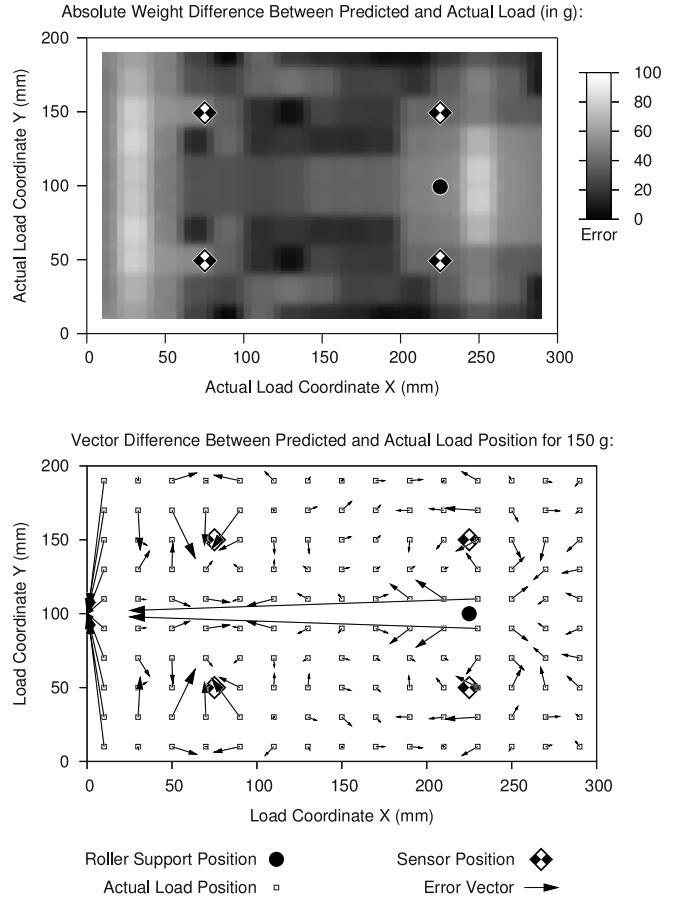


Figure 5. Regression error for 150 g weights placed at intermediate positions

VII. MONITORING MORE COMPLEX STRUCTURES WITH INTELLIGENT AGENTS

While the evaluation results suggest that the tested machine learning methods are, in principle, suitable for load case estimation on simple structures like a metal plate, it is not clear how these methods can successfully be utilized for monitoring much more complex technical structures as well, e.g., objects that comprise many, possibly movable, parts. Several problems arise in such application scenarios. Firstly, the definition of a comprehensive and adequate load case library is more difficult for these structures as the number of relevant load cases might increase exponentially with the number of constituent substructures and the mechanical effects might depend on the movable parts' positions and orientations. Secondly, even if the load case library or FEM effects database does not already reach a prohibitive size due to combinatorial growth, the more complicated the cause-effect relations reflected in the produced datasets become, the less fruitful an identification and extraction of these patterns into a proper model may prove in the data mining and machine learning stages. As a consequence, higher error

rates are to be expected in the actual load case inference. Finally, the machine learning model for the entire structure may grow to a size where it neither can be created or queried as a whole in reasonable time with the available resources nor fit on a single chip. To circumvent these difficulties, we propose an intelligent agent based approach to solving the global monitoring problem by splitting it into multiple spatially constrained subproblems and solving these in a distributed fashion. Such multi-agent systems have already been successfully applied to acoustic detection of high-velocity impacts [4].

Generally, an agent can be viewed as a hardware and/or software entity that receives perceptions from an environment it is situated in and reacts to them, either reflex-based [16] or deliberately [17], in order to perform one or more specific tasks [18]. Applied to the task of monitoring a sensorial structure, the agent may be physically situated on the latter, with its perceptions coming from different groups of sensor nodes and communication with other agents. If the agent has access to a knowledge base of facts about the structure's geometric and mechanical characteristics as well as cause-effect relations with respect to load introduction, it can draw conclusions about the current state of its environment based on its sensory input, i.e., make sense of the sensor signals. It is the presence of this semantic level that distinguishes intelligent agents from nodes of the sensor network described in Section III: While the latter only provide the infrastructure for routing measured sensor data across the physical object and have no way of interpreting this data, the agents are capable of incrementally constructing a mental model of their surroundings over time.

In our approach [19], the structure is partitioned into connected substructures, which can be further partitioned into regions. To each region an individual monitor agent is assigned that regularly adjusts its internal model of the respective region according to its perceptions. Communication among agents covering directly neighboring regions enables the construction of a (simplified) distributed global view of the entire structure. For this purpose, each monitor agent requires an appropriate description of how loads and their effects are transmitted across the boundaries between the agent's region and each of the adjacent regions. That way, an agent can infer from its local sensory input the structural state at these boundaries and send the results to its topological neighbors, which in turn update their local models by combining their own sensor data with the boundary state information they received from their respective neighbors, and, again, pass the updated boundary states on to these, and so forth. Establishing a multilevel hierarchy of agents and incorporating (to a manageable extent, given the available resources) equation-based knowledge from the FEM domain into the reasoning process may yield a distributed load inference algorithm that is adaptive in terms of desired temporal resolution and predictive precision, depending on the number

of communication rounds performed per time unit. Thus, one of the next logical steps in our research will be the development of such algorithms along with the necessary agent communication protocols and their evaluation in the functional mockup system.

VIII. CONCLUSION AND FUTURE WORK

This article presented a novel AI-based process for the design of self-monitoring sensorial structures that utilizes machine learning methods for resource-constrained real-time load case inference. A distributed sensor network architecture and a functional mockup system using a simple steel plate as evaluation scenario was introduced. The general practicability of the machine learning approach was shown for this scenario using noise-free data from FEM simulation only. In the evaluation very simple algorithms like k -NN and decision tree learning already yielded over 90 % correct classifications in the detection whether the plate's maximum displacement vector exceeded a given length due to load introduction. Also numerical regression of the load locations and masses with k -NN attained a prediction quality that may be acceptable in many practical application cases. It seems likely that the results can be improved by employment of more advanced machine learning methods and, in particular, by incorporation of specific domain knowledge from the field of applied mechanics into these. The focus here should lie on the best possible elimination of false negatives, which correspond to unrecognized overload situations, and on the increase of prediction quality for sensor signals with a low signal-to-noise ratio. On the hardware side, further improvement of functional printing processes as well as miniature ADC components is expected to lead to better signal quality and, thus, more accurate load identification results. In addition to this, one of the next steps in our research will be the development and implementation of multi-agent based approaches that enable monitoring of geometrically much more complex structures. When the viability of this has been shown, the machine learning models need to be enhanced to automatically accommodate to structural aging while in operation, e.g., in materials like polymers or textiles, where this aspect is of particular importance.

ACKNOWLEDGMENT

The authors gratefully acknowledge the financial support by the State and University of Bremen in the framework of the ISIS (Integrated Solutions in Sensorial Structure Engineering) Sensorial Materials Scientific Center (fund numbers 54416906, 54416918, and 54416919).

REFERENCES

- [1] M. Maiwald, C. Werner, V. Zöllmer, and M. Busse, "INKtelligent Printing® for sensorial applications," *Sensor Review*, vol. 30, no. 1, pp. 19–23, 2010.

- [2] D. Mayer, T. Melz, C. Pille, and F.-J. Wöstmann, "CAST-TRONICS – direct integration of piezo ceramic materials in high pressure die casting parts for vibration control," in *Proceedings of Actuator 2008 – 11th International Conference on New Actuators*, Bremen, Germany, June 9th-11th 2008, pp. 61–66.
- [3] W. Lang, F. Jakobs, E. Tolstosheeva, H. Sturm, A. Ibragimov, A. Kesel, D. Lehmhus, and U. Dicke, "From embedded sensors to sensorial materials – the road to function scale integration," *Sensors and Actuators: A Physical*, 2011, doi:10.1016/j.sna.2011.03.061.
- [4] W. H. Prosser, S. G. Allison, S. E. Woodard, R. A. Wincheski, E. G. Cooper, D. C. Price, M. Hedley, M. Prokopenko, D. A. Scott, A. Tessler, and J. L. Spangler, "Structural health management for future aerospace vehicles," in *Proceedings of the 2nd Australasian Workshop on Structural Health Monitoring*, Melbourne, Australia, 2004.
- [5] V. K. Wadhawan, *Smart Structures: Blurring the Distinction between the Living and the Nonliving*. Oxford Univ. Press, 2007.
- [6] R. J. M. Vullers, R. van Schaijk, I. Doms, C. Van Hoof, and R. Mertens, "Micropower energy harvesting," *Solid State Electron.*, vol. 53, no. 7, pp. 684–693, 2009.
- [7] O. Maimon and L. Rokach, Eds., *The Data Mining and Knowledge Discovery Handbook*. Springer, 2005.
- [8] A. J. Izenman, *Modern Multivariate Statistical Techniques: Regression, Classification, and Manifold Learning*. Springer, 2008.
- [9] R. Jedermann and W. Lang, "The minimum number of sensors - interpolation of spatial temperature profiles," in *Proceedings of the 6th European Conference on Wireless Sensor Networks (EWSN)*, U. Roedig and C. Sreenan, Eds. Springer, 2009, pp. 232–246.
- [10] A. R. M. Rao and G. Anandakumar, "Optimal placement of sensors for structural system identification and health monitoring using a hybrid swarm intelligence technique," *Smart Mater. Struct.*, vol. 16, no. 6, pp. 2658–2672, 2007.
- [11] J. R. Quinlan, *C4.5: Programs for Machine Learning*. Morgan Kaufman Publishers, Inc., 1993.
- [12] T. M. Mitchell, *Machine Learning*. McGraw-Hill, 1997.
- [13] S. Bosse and D. Lehmhus, "Smart communication in a wired sensor- and actuator network of a modular robot actuator system using a hop-protocol with delta routing," in *Proceedings of Smart Systems Integration 2010 - 4th European Conference and Exhibition on Integration Issues of Miniaturized Systems*, T. Gessner, Ed., Como, Italy, March 23st-24rd 2010, CD-ROM.
- [14] S. Bosse, "Hardware-software-co-design of parallel and distributed systems using a unique behavioural programming and multi-process model with high-level synthesis," in *Proceedings of SPIE Microtechnologies Conference 2011, Session EMT 102 VLSI Circuits and Systems*, Prague, Czech Republic, April 18th-21th 2011.
- [15] M. Maiwald, C. Werner, V. Zöllmer, and M. Busse, "INKtelligent® printed strain gauges," in *Proceedings of the Eurosensors XXIII conference*, Lausanne, Switzerland, September 6th-9th 2009, pp. 907–910.
- [16] R. A. Brooks, "Elephants dont play chess," *Robot. Auton. Syst.*, vol. 6, no. 1&2, pp. 3–15, 1990.
- [17] A. S. Rao and M. P. Georgeff, "Decision procedures for BDI logics," *J. Logic Comput.*, vol. 8, no. 3, pp. 293–343, 1998.
- [18] N. R. Jennings, "On agent-based software engineering," *Artif. Intell.*, vol. 117, no. 2, pp. 277–296, 2000.
- [19] M. Lawo, H. Langer, D. Lehmhus, M. Busse, A. Burblies, and W. Lang, "Simulation techniques for the description of smart structures and sensorial materials," *J. Biol. Phys. Chem.*, vol. 9, pp. 143–148, 2009.